

# Super Parameter Programmer

## SPP-02



Super parameter programmer (SPP-02) is the simple, efficient and practical accessory for parameter configuration with the easy one button operation. Due to the new standard communication protocol, it applies to stand-alone or multi-parallel products.


### Features:

- ◆ One button and one indication led are designed for simplicity and easy-to-operate.
- ◆ RS232 (TTL), RS485 and USB communication are supported.
- ◆ SPPPCTools PC software is used to configure and backup parameters visually, rapidly and conveniently.
- ◆ Dual power supply design. SPP-01 can be powered by battery or Micro-USB cable applying for various environments.


### Main Functions:

- ◆ Parameter configuration function  
Load the parameter configuration to the SPP-01 via SPPPCTools PC software and then update the device's parameters through SPP-01 with easy one button.
- ◆ Data transparent transmission function.  
SPP-01 can be used as the communication converter to connect the device and Solar Station Monitor, a PC software, to establish remote monitoring.

①

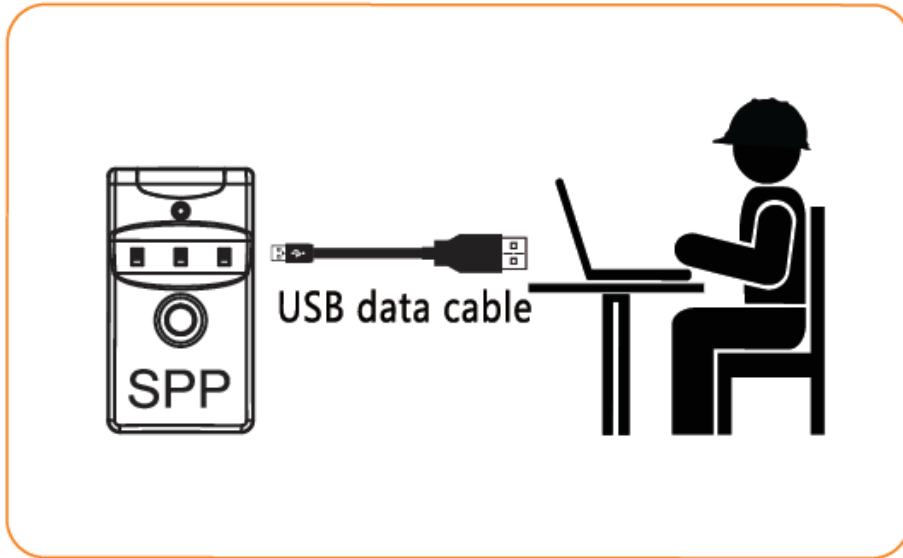

②

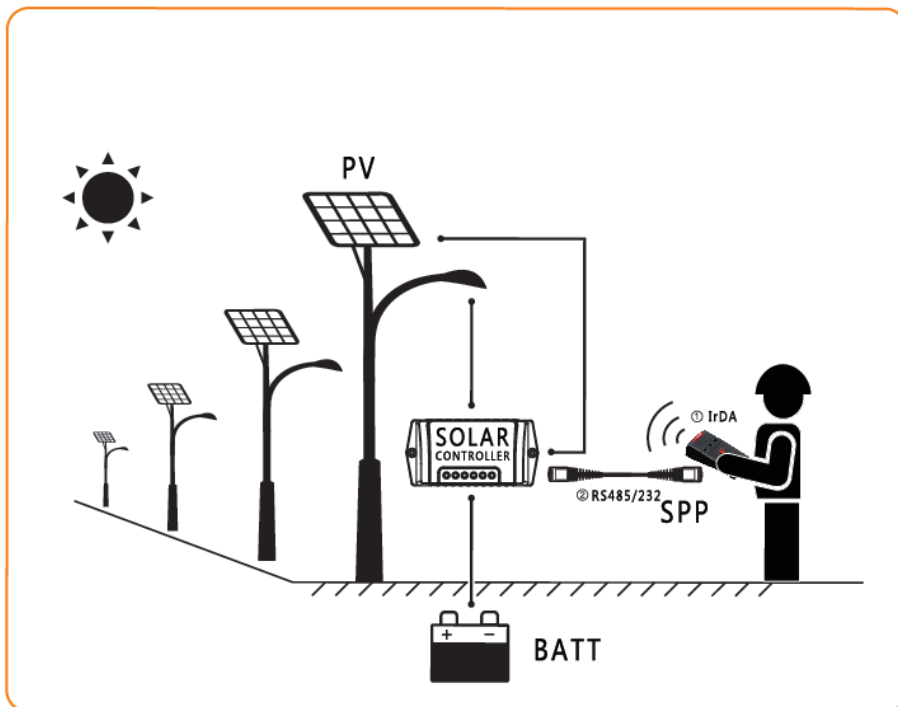



## Accessories :

		
Communication cable CC-RS485-RS485-200U	Communication cable CC-USB-USB-150U	Communication cable CC-TTL-TTL-150U

## Technical specifications :

Model	SPP-02
Power supply voltage	5.0V
Static current	< 40 mA
Communication baud	115200bps
Working temperature	-25°C ~ +55°C
Enclosure	IP30
Overall dimension	109×60×33mm
Net weight	80.1g



BEIJING EPSOLAR TECHNOLOGY CO.,LTD.  
Add: BLDG #18, CO.PARK ,NO.8 HEYING  
ROAD,CHANGPING DISTRICT, BEIJING, CHINA  
Tel: 86-10-82894962 / 82894112  
Fax: 86-10-82894882  
E-mail: info@epsolarpv.com